



JANUARY 20, 2026

Schematic Design And Value Analysis

BONNEY LAKE HIGH SCHOOL EXPANSION



SITE PLAN

2

Goals

- Improve Site Circulation and Traffic
- Safe Pedestrian Walking Paths
- Increased Queuing Capacity
- Updated Drop-Off Areas
- DLC Entry with Bus Drop Off Area Near Classrooms



SCHEMATIC DESIGN | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026



SITE PLAN

3

Goals

- Improve Site Circulation and Traffic
- Safe Pedestrian Walking Paths
- Increased Queuing Capacity
- Updated Drop-Off Areas
- DLC Entry with Bus Drop Off Area Near Classrooms



SCHEMATIC DESIGN | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026




GROUND FLOOR PLAN

4

Goals

- Welcoming Main Entry
- Increased Classroom Capacity
- Learning Communities
- Expanded DLC Program
- Consolidate Student Services and Counseling Areas

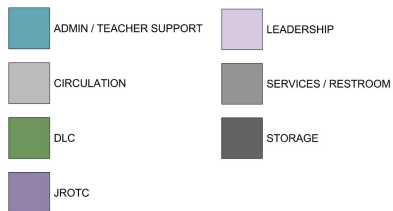

SCHEMATIC DESIGN | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026




SECOND FLOOR PLAN

5

Goals

- Welcoming Main Entry
- Increased Classroom Capacity
- Learning Communities
- Expanded DLC Program
- Consolidate Student Services and Counseling Areas



SCHEMATIC DESIGN | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026



THIRD FLOOR PLAN

6

Goal: Increased Classroom Capacity

Results:

- ✓ 12 General Classrooms
- ✓ 3 Science Labs
- ✓ 3 DLC Classrooms

18 Added Learning Spaces



SCHEMATIC DESIGN | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026



BUILDING RENOVATION

Goals

- Expand Robotics
- Move JROTC into the Building
- Replace PAC Storage Area.
- Replace Leadership Area (at stage)
- Reconfigure DLC back to General Classrooms



SCHEMATIC DESIGN | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026



MAIN ENTRANCE



SCHEMATIC DESIGN | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026





JANUARY 20, 2026

Value Analysis Study

BONNEY LAKE HIGH SCHOOL EXPANSION



VALUE ANALYSIS DEFINITION

10

“Value engineering is an organized approach to optimize both cost and performance in a facility or to identify items that add cost without contributing to the function of the facility. In evaluating the quality, use, life, appearance, and required features of a facility, the value engineering team attempts to achieve value without reducing quality below required levels while maximizing function, cost, and value in design.”

- OSPI, School Facilities Manual



VALUE ANALYSIS STUDY | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026



STUDY GOAL

11

“The goals for this study were to review the current design concepts and identify potential opportunities for design cost effectiveness and efficiency. The VE team sought to identify site development, planning, and building system alternatives that may offer first cost or life cycle cost benefits and/or improve project quality and reduce construction risks.”

The following criteria were described as the most important project requirements:

- **Aesthetics** - Prominent front entrance, general appearance, expression, welcoming.
- **Construction Budget** - First cost (including development and construction costs).
- **Durable Materials** - Long-life materials that will withstand the test of time.
- **Energy Efficiency** - Improves energy performance of the facility.
- **Long-life Systems** - Systems that will last a long time (but may come at a first-cost premium).
- **O&M Impacts** - Support of ongoing operations and maintenance, including maintenance cost.
- **Program / Ed Specs** - Strict adherence to the program or Educational Specifications.
- **Safety and Security** - Design for a safe and secure environment.
- **Total Cost of Ownership** - The total long-term / life cycle cost.

-Meng Analysis, Value Analysis dated November 19, 2025



VALUE ANALYSIS STUDY | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026



RECOMMENDATIONS

12

ID	Name	Current Cost	VE Proposal Cost	Difference	Criteria Scored Ranking	Note*	LCCA Difference
C1	Storm Vault	\$190,000	\$97,000	\$93,000	4		
C2	ADA Ramp	\$197,000	\$274,000	(\$77,000)	6		
S1	Floor Framing	\$572,000	\$352,000	\$220,000	8		
S2	Lateral System	\$145,000	\$173,000	\$199,000	9		
A1	Stair Tower	\$175,000	\$91,000	\$84,000	10		
A2	Study Nooks	\$4,000	\$15,000	(\$11,000)	5		
M1	Integrated Design	\$8,224,000	\$8,015,000	\$209,000	2	LCCA	\$418,000
M2	Thermal Generation	\$3,625,000	\$910,000	\$2,715,000	3		
M3	Energy Source	\$3,625,000	\$3,508,000	\$117,000	1	LCCA	\$409,000
E1	Transfer Power	\$38,000	\$87,000	(\$49,000)	7		
E2	Store Power	\$152,000	\$197,000	(\$45,000)	12		
E3	Electrical Service	\$220,000	\$94,000	\$126,000	11		
SUBTOTAL VE PROPOSALS				\$3,581,000			



VALUE ANALYSIS STUDY | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026



RECOMMENDATIONS

13

Prop. #	COMPONENTS AND SYSTEMS	PROJECTED COST REVISION (Rough Order of Magnitude)	ACCEPT	REJECT	MODIFY	MAYBE	COMMENTS / DISCUSSION
C1	Storm Vault	\$ 93,000		X			The team is planning to provide storage instead of adding vaults. This concept doesn't work for the baseball field due to the drainage direction. A metered discharge will be provided if needed.
C2	ADA Ramp	\$ (77,000)		X			The idea is good, but this concept requires the existing driveway to shift. Grading wise, this doesn't seem feasible. A new retaining wall would be needed on the opposite side of the new roadway that is not included in the estimate.
S1	Floor Framing	\$ 220,000		X			The floor joists will be closer on spacing. The floor vibrations can be an issue as they don't perform as well as the wide flange beams. Steel beams allow more flexibility to the owner and keeps the floor structure less deep.
S2	Lateral System	\$ 199,000		X			Adding all of the light gage shear walls will compromise future flexibility to the school district. The weight of the floor structure is really heavy and the amount of shear walls would be excessive. In our experience, for multiple story buildings, brace frames are more efficient and cost effective.



VALUE ANALYSIS STUDY | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026



COST IMPACT

14

Bond Project Budget:	\$70,395,000
Project MACC:	\$46,900,000
Offsite MACC:	\$6,400,000
Schematic Design Estimate:	\$44,364,234
Proposed Change from Value Analysis: (Net Add)	\$163,000
Proposed Savings Under Consideration:	\$2,710,000



VALUE ANALYSIS STUDY | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026



ROLE OF SCHOOL BOARD

15

Acceptance of the Value Engineering Report

“School district board acceptance of a value engineering report, and its implementation, shall be filed with the Form D-7 submittal.”

- OSPI, School Facilities Manual



VALUE ANALYSIS STUDY | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026



PROJECT SCHEDULE

16

Educational Specs	February – June 2025
Schematic Design:	April – Oct 2025
GCCM Selection	August - Dec 2025
Value Analysis	Nov 2025 - Jan 2026
Design Development	Oct 2025 – Feb 2026
Permit Submittal	January 2026
Construction Documents	March – June 2026
Constructability Review	May - June 2026
Construction	June 2026 – Sept 2028
School Opens	September 2028



VALUE ANALYSIS STUDY | BONNEY LAKE HIGH SCHOOL EXPANSION, JANUARY 20, 2026





THANK YOU !



BONNEY LAKE HIGH SCHOOL EXPANSION